

Electric water heaters



- Enamelled steel water tank
- Temperature regulation with external knob
- New ohmic protection system (reduced consumption of the magnesium anode)
- Polyurethane insulation without CFC and HCFC
- Analogic thermometer (not present in 10-15 l models)
- Built-in dielectric fitting
- Light indicator
- Grade of protection: IP24


	Product code	Capacity	Installation	Rating/Voltage	Temperature regulation (with knob)	Dimensions
V530	7110906	30	Upright	1.200	external	623 x 338 mm
V550	7110907	50	Upright	1.200	external	585 x 433 mm
V580	7110908	80	Upright	1.200	external	814 x 433 mm
V510	7110909	100	Upright	1.200	external	973 x 433 mm
O580	7110910	80	Horizontal	1.500	external	789 x 433 mm
O510	7110911	100	Horizontal	1.500	external	948 x 433 mm
V580 TD	7110912	80	Thermoelectric upright (right connection)	1.500	external	814 x 433 mm
V580 TS	7110913	80	Thermoelectric upright (left connection)	1.500	external	814 x 433 mm
V510 TD	7110914	100	Thermoelectric upright (right connection)	1.500	external	973 x 433 mm
V510 TS	7110915	100	Thermoelectric upright (left connection)	1.500	external	973 x 433 mm
R501	7110903	10	Above sink	1.200	external	456 x 255 mm
R501 SL	7110902	10	Under sink	1.200	external	456 x 255 mm
R515	7110905	15	Above sink	1.200	external	399 x 338 mm
R515 SL	7110904	15	Under sink	1.200	external	399 x 338 mm




Electric water heaters

STORAGE

horizontal 80/100 lt

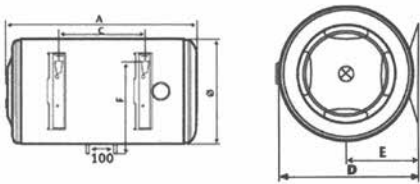

upright 30/50/80/100 lt

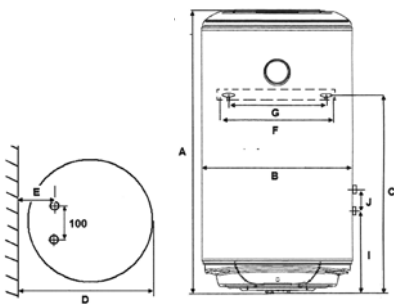

	Capacity	A/H	Ø	B	C	D
V 530	30	623	338	-	423	86
V 550	50	585	433	-	380	451
V 580	80	814	433	-	585	451
V 510	100	973	433	-	785	451
O 580	80	789	433	-	395	451
O 510	100	948	433	-	555	451
V 580 TD	80	814	433	-	585	451
V 510 TD	100	973	433	-	785	451
V 580 TS	80	814	433	-	585	451
V 510 TS	100	973	433	-	785	451

	Capacity	E	F	G	I	J
V 530	30	350	100/320	240/272	-	-
V 550	50	165	100/320	240/272	-	-
V 580	80	165	100/320	240/272	-	-
V 510	100	165	100/320	240/272	-	-
O 580	80	234	365	240/272	-	-
O 510	100	234	365	240/272		
V 580 TD	80	165	100/320	240/272	251	206
V 510 TD	100	165	100/320	240/272	251	206
V 580 TS	80	165	100/320	240/272	251	206
V 510 TS	100	165	100/320	240/272	251	206

dimensions (mm)